


CABLE GLANDS

A2F GLAND

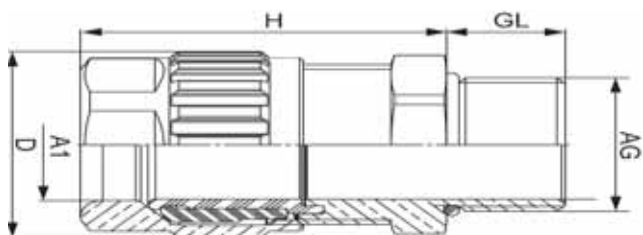

Construction:

Material:	brass, nickel-plated brass or stainless steel on request
Seals / O-Rings:	silicone, VMQ
Clamping insert:	PA 6
Temperature Range:	- 60° C / 105° C (-76 °F / 221 °F)
Protection:	IP 66, 67 and 68 (5 bar)
Certificate:	IECEX DEK 12.0039 X DEKRA 12 ATEX 0139 X CSA 2557737

Features:

According to the latest IECEx and ATEX standards

Ex-e / Ex-d / Ex-ta

Zones 1, 2, 20, 21, 22

II 2G Ex d e IIC Gb / II 1D Ex ta IIIC Da

Equipment Protection Level MbGbDa

IP 66, 67 and 68 (5 bar)


Halogen - and phosphorous-free

Silicone Seals and O-Ring are standard



CABLE GLANDS

A2F GLAND

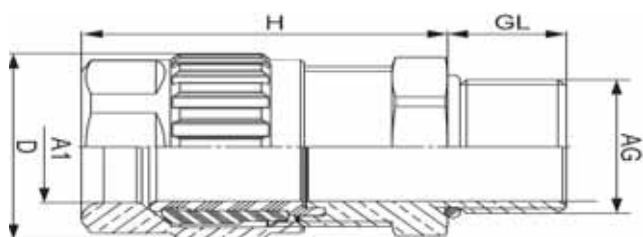

Metric Brass:

Part no.	Gland Size	AG	wrench mm	D mm	H max.	GL mm	A1 mm
HWCG400316..50	20 - 1	M 16 x 1,5	22	27	35,6	16	6 - 12
HWCG400320..50	20 - 1	M 20 x 1,5	22	27	35,6	16	6 - 12
HWCG400320..51	20 - 2	M 20 x 1,5	24	29	39,7	16	9 - 16
HWCG400325..50	20 - 3	M 25 x 1,5	30	35	47,5	16	12,5 - 20,5
HWCG400332..50	25	M 32 x 1,5	36	42	47,8	16	16,9 - 26
HWCG400340..50	32	M 40 x 1,5	46	52	51,1	16	22 - 23
HWCG400350..50	40	M 50 x 1,5	55	64	56,8	16	28 - 41
HWCG400363..50	50	M 63 x 1,5	65	73	65,4	16	40 - 52,6
HWCG400375..50	63	M 75 x 1,5	80	90	70,3	16	51 - 65,3
HWCG400390..50	75	M 90 x 2	95	107	76,2	20	62 - 78

NPT Brass:

Part no.	Gland Size	AG	wrench mm	D mm	H max.	GL mm	A1 mm
HWCG400338..70	20 - 1	NPT 3/8"	22	27	35,6	16	6 - 12
HWCG400312..70	20 - 1	NPT 1/2"	22 / 24	27	35,6	20	6 - 12
HWCG400312..71	20 - 2	NPT 1/2"	24	29	39,7	20	9 - 16
HWCG400334..70	20 - 3	NPT 3/4"	30	35	47,5	20,5	12,5 - 20,5
HWCG400310..70	25	NPT 1"	36	42	47,8	25	16,9 - 26
HWCG400354..70	32	NPT 1 1/4"	46	52	51,1	26	22 - 23
HWCG400364..70	40	NPT 1 1/2"	55	64	56,8	26,5	28 - 41
HWCG400320..70	50	NPT 2"	65	73	65,4	27	40 - 52,6
HWCG400352..70	63	NPT 2 1/2"	80	90	70,3	40	51 - 61
HWCG400330..70	75	NPT 3"	95	107	76,2	41,5	62 - 78

* The two point inside the part number refers to the different materials in which cable glands can be produced:

00: brass

02: stainless steel (on request)

03: nickel plated brass